

NEW

ROCAM[®] 4 PLUS

Inspection camera for pipes from Ø 40–300 mm with 30 m or 65 m cable length, with integrated software for documentation and large removable 10,4" Touchscreen



Intuitive

Easy operation with 10,4" Touchscreen including documentation



Flexible

Picture and video transmission via WiFi, Micro-HDMI, Mini-USB, SD-card



Variable

Inspection (Ø 40–300 mm) through different camera heads and reels



NEWS

ROCAM® 4 PLUS

NEW ROCAM® 4 PLUS

ROCAM® 4 PLUS

WiFi transmitter

Simple data transmission to mobile devices

Li-Ion battery 18V / 4,0 Ah (same as ROMAX® 4000)

Long battery operation time (up to 6 hours)

Removable display unit with 10.4" Colour-Touchscreen

Full functionality, even in confined spaces

Digital metre count

Precise determination of distance to camera head

Integrated speakers

Direct audio replay

Integrated microphone

Voice recording for documentation possible

Exchangeable reel system 65 m / 30 m / 8 m

Large operating range from Ø 40 mm pipe diameter



Removable 10,4" Touchscreen (IP 54)



Compact dimensions ideal for confined work spaces




Locating with ROSCOPE® module ROLOC PLUS

ROCAM® 4 PLUS

Inspection camera for pipes from Ø 40 – 300 mm with 30 or 65 m cable length, with integrated software for documentation and large removable 10,4" Touchscreen.

- Picture editing, change of camera settings and menu guidance via the 10,4" Colour-Touchscreen
- Direct recording of pictures (JPG) or video (AVI, resolution 720 x 600), as well as editing options (e.g. documentation of damage)
- Fast data recording with integrated keyboard to mark, highlight and name damages
- Picture and video transmission via WiFi, Micro-HDMI, Mini-USB, SD-card
- Livestream of picture and data via WiFi to the ROCAM® 4 App
- Self-levelling and exchangeable camera heads
- Exchangeable reels for various working ranges
- New platform based battery technology



Technical Data

Description	
Picture-/video format	JPG / AVI (resolution 720 x 600)
Camera head	Ø 25 mm, waterproof with 8 LEDs Ø 30 mm, self-levelling and waterproof with 10 LEDs Ø 40 mm, self-levelling and waterproof with 36 LEDs
Working area	Ø 40 – 100 mm (Mini-Module) Ø 70 – 150 mm (30 mm camera head) Ø 100 – 300 mm (40 mm camera head)
Cable length	30 m version 65 m version 8 m Mini-Module (optional)
Cable diameter	7 mm (30 m und 65 m reel) 5.5 mm (Mini-Module)
Transmitter frequency	33 kHz
Power supply	Li-Ion battery 18 V/4 Ah Main adaptor 110 - 230 V, 50 - 60 Hz (optional)

Variants


Model	No.
ROCAM® 4 Plus - 30 m cable, 30 mm head EU	1500002613
ROCAM® 4 Plus - 30 m cable, 40 mm head EU	1500002614
ROCAM® 4 Plus - 65 m cable, 30 mm head EU	1500002615
ROCAM® 4 Plus - 65 m cable, 40 mm head EU	1500002616
ROCAM® 4 - 8 m Mini-Module, 25 mm camera head	1500001472



Cover protected connections for SD-card, Micro-HDMI, Mini-USB with protection cover



High flexibility and durability

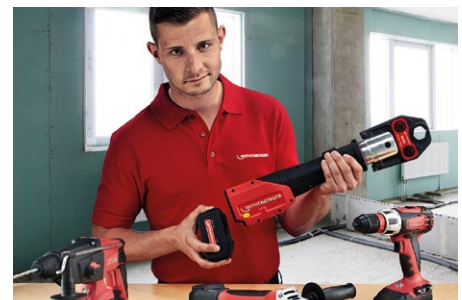


New platform based battery technology

+ Further products




Mini-Module
No. 1500001472



Camera head
30 mm: No. 150000123
40 mm: No. 150000122



Guide skirts for brush attachments
30 mm: No. 1500000817
40 mm: No. 69112



Brush attachments
Ø 100 mm: No. 69113
Ø 150 mm: No. 69117



Rolling skids for 40 mm
Ø 150 mm: No. 69118
Ø 200 mm: No. 69119



ROCAM® 4 PLUS
AC Adaptor 110 – 240 V,
50/60 Hz
No. 1000002085

ROLOC PLUS

Positioning module for sondes



No. 1000000861

R600 Set

Drain cleaning machine for pipe
Ø 20 – 150 mm



No. 19173

RODRUM M&L

Drum Drain Cleaning machine with
automatic spiral feed for pipes
Ø 70 – 250 mm



No. 1000001711 (RODRUM M 13 + Toolkit 16 mm, EU)
No. 1000001713 (RODRUM L 16 + Toolkit 16 mm, EU)

Your ROTHENBERGER specialist retailer:

ROTHENBERGER Werkzeuge GmbH
Industriestraße 7
D-65779 Kelkheim

☎ + 49 (0) 6195 / 800 - 0
☎ + 49 (0) 6195 / 800 - 35 00
✉ info@rothenberger.com
🌐 rothenberger.com